


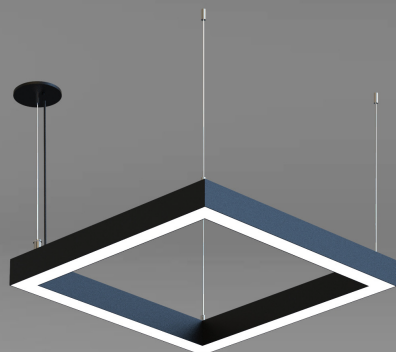

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED SQUARE+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS

Enter the Product Code into the boxes above.

SIZE

_____ ft

1-8 ft Arm length.

SOURCE

- ☐ 5 W/ft
- ☐ 7 W/ft
- ☐ 10 W/ft

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V¹

1. Verify availability.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DL2 - 0-10V Dim (TW)
- ☐ DLA - 0-10V Dim (Aux)
- ☐ DA4 - DALI D4i
- ☐ CV - Constant Voltage (RGBW)
- ☐

Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK¹
- ☐ S6W - 6ft Cord WH¹
- ☐ S ft²
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless

1. Canopy match the Cord color.
2. Specify Suspension length/color.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
- ☐ WH - White²
- ☐ CF/RAL

1. RAL 9005
2. RAL 9016
Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐ RGBW¹
- ☐ TW - Tunable White (27K-65K)²
- ☐

1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

OPTIONS

- ☐ No Options¹
- ☐ EC - Emergency Circuit
- ☐ CB - Casambi Bluetooth(TW, RGBW)
- ☐ DMX - DMX (RGBW)
- ☐ JD - JDRF Autonomy Sensor (DA4)
- ☐ DOS - Daylight & Occupancy Sensor (DLA)
- ☐ AWN - Athena Wireless Node (DLA)

1. Leave empty.

LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm





Declare.


Project:

Type:


SIZE:

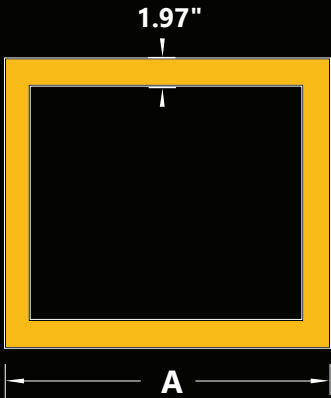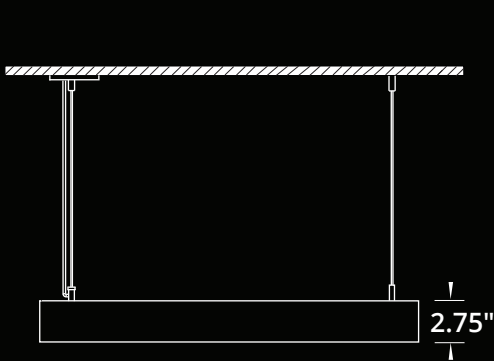

RADIANCE:



MOUNTING:

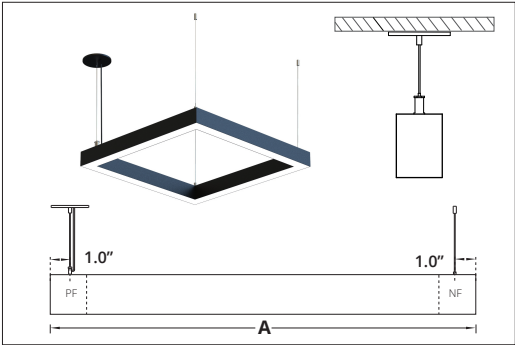


SUSPENDED

PF - Power Feed

NF - Non Power Feed

Size	A
1 ft	13.67 in
2 ft	26.42 in
3 ft	37.42 in
4 ft	50.20 in
5 ft	61.20 in
6 ft	73.92 in
7 ft	84.92 in
8 ft	97.67 in


A - Arm Length

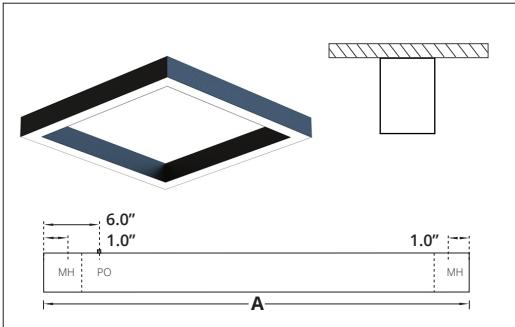

SURFACE MOUNT

PO - Power Opening

MH - Mounting Hole

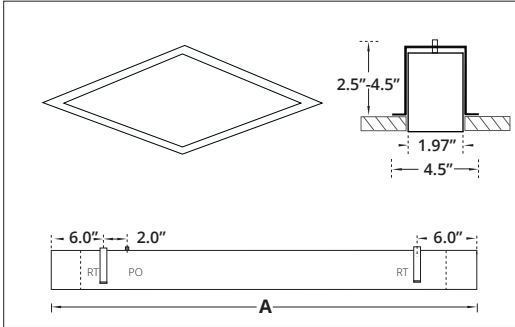

RECESSED TRIMLESS

PO - Power Opening

RT - Recessed Trimless Bracket

Cutout Dimensions = Total Length x Width of Extrusion.