


**FEATURES:**

- ✓ Architectural acoustic luminaire with direct lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ Also available with custom colour options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

**reinventlight**
**SPECIFICATION:**
**Sonic DRUM+**  -  -  -  -  -  -  -  -  -  -  -  - 

Enter the Product Code into the boxes above.

**TYPE**
 BS - Bell

**HEIGHT**
 12 in  
 16 in  
 24 in

**SIZE**
 30 in

**SOURCE**
 25W  
 50W

**RADIANCE**
 DD - Direct

**VOLTAGE**
 UNV - 120/277V  
 347V<sup>1</sup>
<sup>1</sup>. Verify availability.

**DRIVER**
 ST - On/Off  
 DL - 0-10V Dim (1%)  
 DLO - 0-10V Dim (to Off)  
 DL2 - 0-10V Dim (TW)  
 CV - Constant Voltage (RGBW)  


Specify dimming protocol.

**MOUNTING**
 S6B - 6ft Cord BK<sup>1</sup>  
 S6W - 6ft Cord WH<sup>1</sup>  
 S  ft<sup>2</sup>
<sup>1</sup>. Canopy match the Cord color.  
<sup>2</sup>. Specify Suspension length/color.

**LENS**
 OP - Opal

**ED DRUM+ FINISH**
 BK - Black<sup>1</sup>  
 WH - White<sup>2</sup>  
 1. RAL 9005  
 2. RAL 9003

**CCT**
 30K - 3000 Kelvin/90CRI  
 35K - 3500 Kelvin/90CRI  
 40K - 4000 Kelvin/90CRI  
 RGBW<sup>1</sup>  
 TW - Tunable White (27K-65K)<sup>2</sup>  

<sup>1</sup>. Available with CV.  
<sup>2</sup>. Available with DL2.  
 Specify required CCT.

**ACOUSTIC FINISH**

Please specify Outside Acoustic &amp; Inside Wool Felt Layer, for example (04/121)



01



02



03



04



07



09



18



24




28



33

**WOOL FELT FINISH**


111



121



131



133



145



151



164



181



182



183

**LUMEN OUTPUT:**


Watts	30K	35K	40K
25 W	2205 lm	2250 lm	2295 lm
50 W	4410 lm	4500 lm	4590 lm


**Project:**
**Type:**

905-830-0339 / 1-800-667-9281

info@edisonlighting.ca

www.edisonlighting.ca

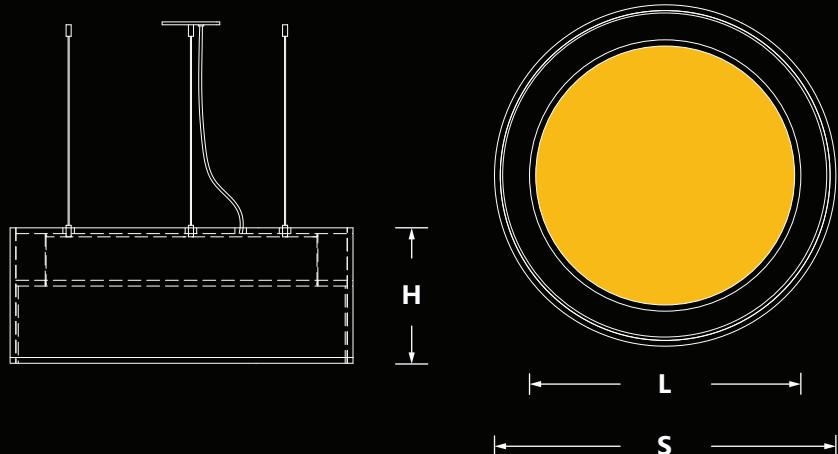**SIZE:**


H - Height	S - Size (Diameter)
12 in = 11.75 in	30 in = 29.75 in
16 in = 15.75 in	<b>L - Luminaire</b>
24 in = 23.75 in	23.75 in

**FINISHES:**


(04/121)



(04/133)



(04/183)



(04/111)



(28/121)



(28/133)



(28/183)



(28/111)