

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral louver combined with opal lens insert provide excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for surface mounted installations.
- ✓ LED Spot is rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED CUBIX+ TYPE x SOURCE - RADIANCE - VOLTAGE - DRIVER - MOUNTING - LOUVER - FINISH - CCT

Enter the Product Code into the boxes above.

TYPE

- 1 - Single
- 2 - Double
- 3 - Triple

SOURCE

- 5W
- 10W
- 15W

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V

DRIVER

- ST - On/Off
 - DL - 0-10V Dim (1%)
 - DA4 - DALI D4i
 -
- Specify dimming protocol.

MOUNTING

- SF - Surface Mount

LOUVER

- LW - White
- LB - Black
- LS - Silver

FINISH

- BK - Black¹
 - WH - White²
1. RAL 9005
2. RAL 9003

CCT


- 30K - 3000 Kelvin/90CRI
 - 35K - 3500 Kelvin/90CRI
 - 40K - 4000 Kelvin/90CRI
 -
- Specify required CCT.

DIMENSIONS:

Unit	Length	Height	Width
Single	3.750 in	4.500 in	3.750 in
Double	7.375 in	4.500 in	3.750 in
Triple	10.937 in	4.500 in	3.750 in

LUMEN OUTPUT:

Watts	30K	35K	40K
5 W	465 lm	475 lm	480 lm
10 W	930 lm	950 lm	970 lm
15 W	1395 lm	1425 lm	1450 lm

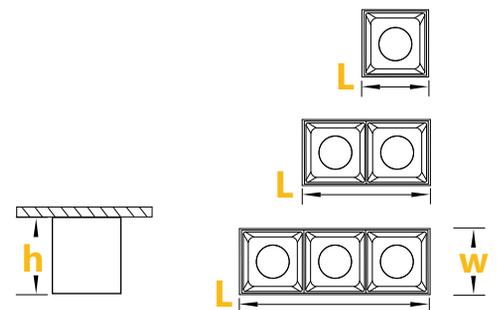

Project:

Type: