

FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for recessed applications in drywall or T-Bar ceilings.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

SPECIFICATION:

ED VECTOR+ - - - - - - - - - -

Enter the Product Code into the boxes above.

SIZE

_____ ft
1-8 ft
Continuous Run
(1 ft Increments)

SOURCE

- 5 W/ft
- 7 W/ft
- 10 W/ft

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V
 - 347V¹
1. Verify availability.

DRIVER

- ST - On/Off
 - DL - 0-10V Dim (1%)
 - DLO - 0-10V Dim (to Off)
 - DL2 - 0-10V Dim (TW)
 - DLA - 0-10V Dim (Aux)
 - DA4 - DALI D4i
 - CV - Constant Voltage (RGBW)
 -
- Specify dimming protocol.

MOUNTING

- RS - Recessed
- RB - Recessed T-Bar

LENS

- OP - Opal
- AS - Asymmetric
- PR - Prismatic

FINISH

- BK - Black¹
 - WH - White²
 - CF/RAL
1. RAL 9005
2. RAL 9016
Specify required RAL number.

CCT

- 30K - 3000 Kelvin/90CRI
 - 35K - 3500 Kelvin/90CRI
 - 40K - 4000 Kelvin/90CRI
 - RGBW¹
 - TW - Tunable White (27K-65K)²
 -
1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

OPTIONS

- No Options¹
 - EM - Emergency Battery Pack²
 - EC - Emergency Circuit
 - DR - Damp Rated
 - CB - Casambi Bluetooth(TW, RGBW)³
 - DMX - DMX (RGBW)
 - JD - JDRF Autonomy Sensor (DA4)³
 - DOS - Daylight & Occupancy Sensor (DLA)³
 - AWN - Athena Wireless Node (DLA)³
1. Leave empty.
2. Battery Pack per 4 ft section.
3. Available in sizes 4 ft and up.

LUMEN OUTPUT W/ft:


| Watts | 30K | 35K | 40K |
|-------|---------|---------|---------|
| 5 W | 515 lm | 525 lm | 535 lm |
| 7 W | 720 lm | 735 lm | 750 lm |
| 10 W | 1030 lm | 1050 lm | 1080 lm |




Project:

Type:

SIZE:



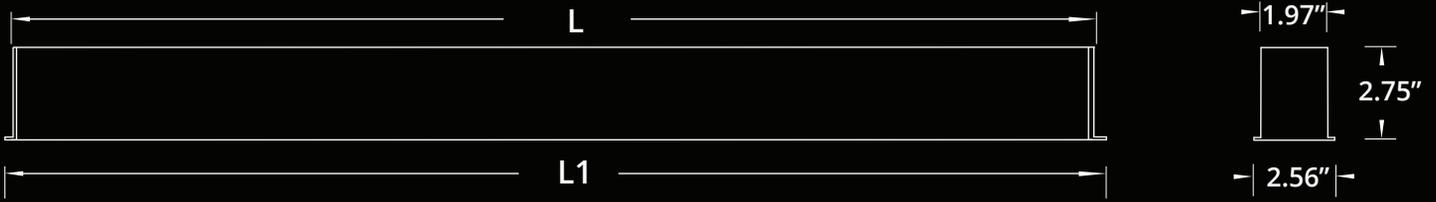


CONTINUOUS RUN:

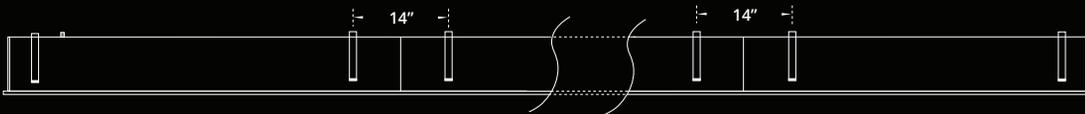


1. L- Total length for Drywall ceiling.
2. L1- Total length for T-Bar ceiling.

RADIANCE:



MOUNTING:

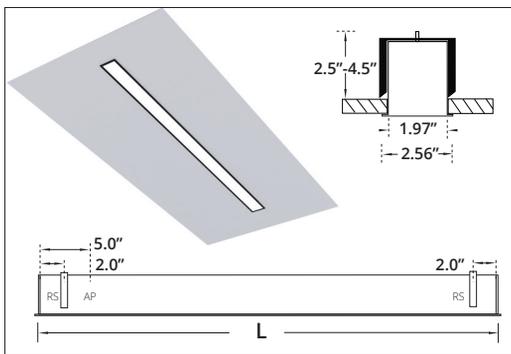


RECESSED

AP - Access Power Plate
RS - Recessed Bracket
Cutout Dimensions = Total Length x Width of Extrusion.

| Size | L (Drywall Ceiling) |
|------|---------------------|
| 1 ft | 11.34 in |
| 2 ft | 22.34 in |
| 3 ft | 33.34 in |
| 4 ft | 48.22 in |
| 5 ft | 59.22 in |
| 6 ft | 71.97 in |
| 7 ft | 82.97 in |
| 8 ft | 95.72 in |

1. L is Total length with endcaps for Drywall Ceiling.
2. Cutout Dimensions = Total Length x Width of Extrusion.

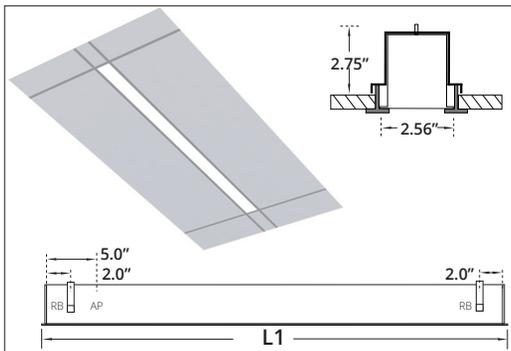

RECESSED T-BAR

AP - Access Power Plate
RB - Recessed T-BAR Bracket

| Size | L1 (T-Bar Ceiling) |
|------|--------------------|
| 1 ft | 11.75 in |
| 2 ft | 23.75 in |
| 3 ft | 35.75 in |
| 4 ft | 47.75 in |
| 5 ft | 59.75 in |
| 6 ft | 71.75 in |
| 7 ft | 83.75 in |
| 8 ft | 95.75 in |

L1 is Total length with endcaps for T-Bar Ceiling.