



**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency semi-specular integral reflector comes with 40° lighting distribution.
- ✓ Available with an optional flat frame plate for NC installations.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Choice of integrated reflector for standard downlight or asymmetric wall wash illumination.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**

**SPECIFICATION:**

**ED RD+**  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

**SIZE**

- 4 in

**SOURCE**

- 10 W
- 20 W

**RADIANCE**

- DD - Direct

**VOLTAGE**

- UNV - 120/277V
  - 347V<sup>1</sup>
1. Verify availability.

**DRIVER**

- ST - On/Off
  - DL - 0-10V Dim (1%)
  -
- Specify required dimming method.

**MOUNTING**

- RT - Retrofit
- NC - New Const. Plate

**BEAM**

- BF - Flood 40°
- BA - Asymmetric

**TRIM**


- BK - Black<sup>1</sup>
  - WH - White<sup>2</sup>
1. RAL 9005  
2. RAL 9003

**CCT**

- 30K - 3000 Kelvin/90CRI
  - 35K - 3500 Kelvin/90CRI
  - 40K - 4000 Kelvin/90CRI
  -
- Specify required CCT.

**DIMENSIONS:**

Height	Width	Cut Out
5.250"	4.375"	3.750"

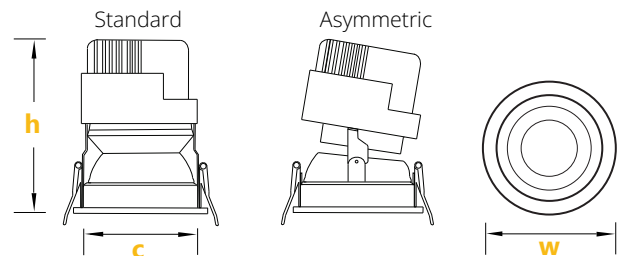

**LUMEN OUTPUT:**


Watts	30K	35K	40K
10 W	975 lm	1000 lm	1025 lm
20 W	1950 lm	2000 lm	2050 lm



Project: \_\_\_\_\_

Type: \_\_\_\_\_

**DRIVER BOX:**

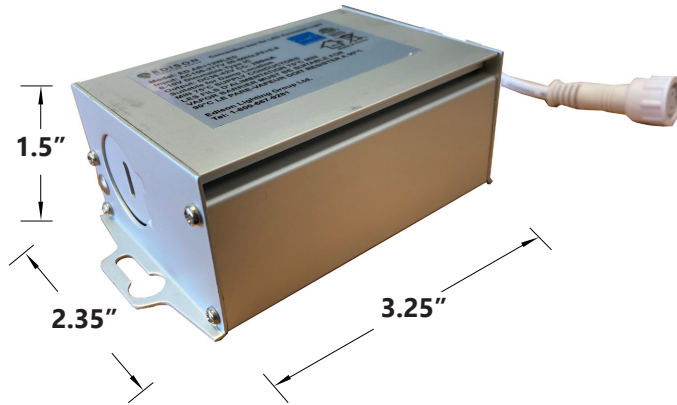

**NC PLATE:**

