



FEATURES:

- ✓ Architectural acoustic luminaire with direct lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ Sleek body of the luminaire combines two aluminum side with laser cut metal top enclosure.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

Sonic RING+ - - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- FV - Flush V-Cut
- FR - Flush Regular
- RA- Recessed Angle¹
-

¹. Available in 12 in height and 2 ft size only. Specify custom type.

HEIGHT

- 12 in
- 16 in
- 24 in

SIZE

- 2 ft
- 3 ft
- 4 ft

SOURCE

- 25 W
 - 50 W
 - 75 W¹
- ¹. Available for 4 ft.

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V
 - 347V¹
- ¹. Verify availability.

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- CV - Constant Voltage (RGBW)
-

Specify dimming protocol.

MOUNTING

- S6B - 6 ft Cord BK¹
 - S6W - 6 ft Cord WH¹
 - S ft²
- ¹. Canopy match the Cord color.
². Specify Suspension length/color.

LENS

- OP - Opal

FINISH

- BK - Black¹
 - WH - White²
- ¹. RAL 9005
². RAL 9003

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW¹
- TW - Tunable White (27K-65K)²
-

¹. Available with CV.
². Available with DL2. Specify required CCT.

ACOUSTIC FINISH

Specify additional color for Two-Tone, for example 11/04.



LUMEN OUTPUT:

Watts	30K	35K	40K
25 W	2205 lm	2250 lm	2295 lm
50 W	4410 lm	4500 lm	4590 lm
75 W	6615 lm	6750 lm	6885 lm




Declare.

Project:

Type:

SIZE:

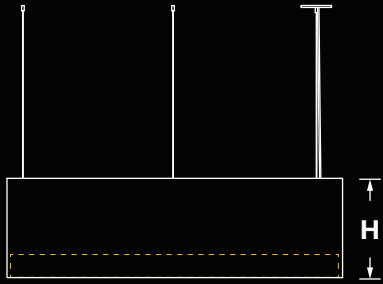

H - Height		D - Diameter	
12 in = 11.75 in	2 ft	27.053 in	
16 in = 15.75 in	3 ft	36.502 in	
24 in = 23.75 in	4 ft	48.313 in	

FR-FLUSH REGULAR

D

TYPE:



FV - FLUSH V-CUT



FR - FLUSH REGULAR



RA - RECESSED ANGLE

Available in 12 inch height and 2 feet size only .

FINISHES:



**FV - TWO TONE
04/11**



**FV - TWO TONE
09/24**



**FV - TWO TONE
04/25**